

FRYEFLOW

Inlet Filter Bag



Keep construction dirt out of storm drains while still allowing water to pass through.


With its under-grate installation and easy cleaning, FryeFlow offers superior sediment control through its patented frame + basket design. Not only does it outperform competing products in terms of keeping streets cleaner, but it also significantly reduces silt accumulation by maintaining better flow.

Maintaining FryeFlow is a breeze. Simply remove the grate, attach a lifting device to the webbing strips, lift out and dump debris. Alternatively, a vac-ter unit can be used. Our reusable units should be monitored after each storm event to ensure optimal performance.

Upgrade to FryeFlow today and experience the benefits of a cleaner, more effective sediment control solution.

Benefits:

- Woven geotextile & steel frame provide reliable strength
- Designed to greatly reduce ponding in streets
- Easy to install & maintain; won't fall into grate
- Reusable system
- System is protected from damage from traffic

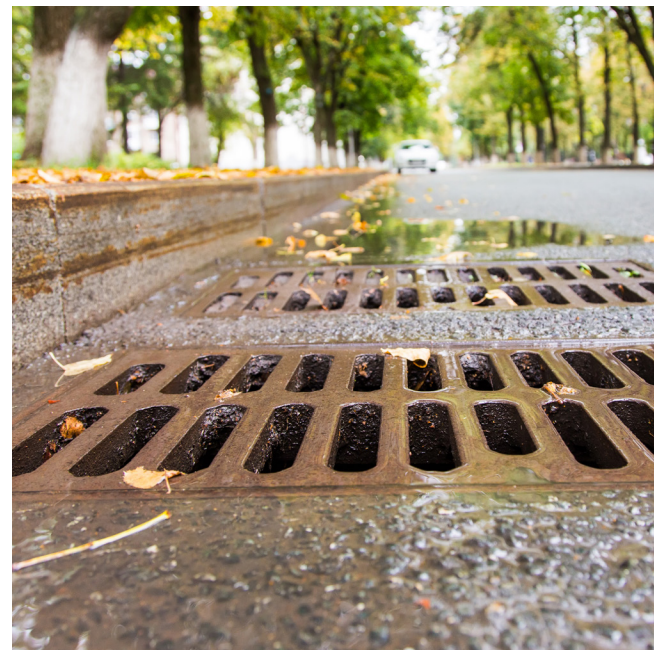

MKB Stormwater
Innovation

888-578-0777
mkbcompany.com

©2024 MKB Company. All Rights Reserved.

All statements, product characteristics, and performance data contained herein are believed to be reliable based on observation and testing, but no representations, guarantees, or warranties of any kind are made as to accuracy, suitability for particular applications, or the results to be obtained. Nothing contained herein is to be considered to be permission or a recommendation to use any proprietary process or technology without permission of the owner. No warranty of any kind, expressed or implied, is made or intended. US Patent 8,652,323 may apply. Made in USA with globally sourced materials.

FRYEFLOW

Inlet Filter Bag

FryeFlow Inlet Filter Bag Product Specs:

Bag Material Type	Woven Polypropylene Geotextile		
Frame Material Type	Steel		
Fabric Property	Test Method	Unit	M.A.R.V.
Grab Tensile	ASTM D-4632	Lbs. (kN)	365 x 200 (1.62 x 0.89)
Grab Elongation	ASTM D-4632	%	15
Trap Tear	ASTM D-4533	Lbs. (kN)	115 x 75 (0.51 x 0.33)
CBR Puncture Resistance	ASTM D-6241	Lbs. (kN)	675 (3.00)
Apparent Opening Size (AOS)*	ASTM D-4751	US Std. Sieve (mm)	40 (0.425)
Permittivity*	ASTM D-4491	Sec ⁻¹	2.1
Water Flow Rate*	ASTM D-4491	gpm/ft ² (l/min/sm)	145 (5907)
UV Resistance	ASTM D-4355	%/hrs	90/500
Mullen Burst	ASTM D-3786	psi	450

*At the time of manufacturing. Handling may change these properties.

Item List:

Frye Flow Inlet Bag with Frame	
Part Number	Description
FF-IB-16-17	16" x 17"
FF-IB-16-30-CG	16" x 30" Curb and Gutter
FF-IB-16-30X2	16" x 30" Double Bag with Bonnet
FF-IB-16-35-CG	16" x 35" Curb and Gutter
FF-IB-18-30	18" x 30"
FF-IB-18-36	18" x 36"
FF-IB-20-36DE	20" x 36"
FF-IB-21-47	21" x 47"
FF-IB-22-22	22" x 22"
FF-IB-2-3	2' x 3'
FF-IB-23-23	2' x 2'
FF-IB-24-24	27" x 27"
FF-IB-2R	2' Round

Frye Flow Inlet Bag with Frame	
Part Number	Description
FF-IB-30-30	30" x 30"
FF-IB-32-34-WR	32" x 34" WR Maryland Bag
FF-IB-38-38	38" x 38"
FF-IB-3R	3' Round
FF-IB-V7045	Casting V7045
FF-IB-15-34	15" X 34" Casting 7505
FF-IB-7750	Casting 7750
FF-IB-V4520-BF	Casting V4520 with Bent Frame
FF-IB-7390-BF	Casting 7390 with Bent Frame
FF-IB-7730-BF	Casting 7730 with Bent Frame

Frye Flow Bonnet Guard Replacements	
Part Number	Description
FF-16-35-Bonnet	16" x 35" Bag
FF-2-3-Bonnet	2' x 3' Bag